



Rack Systems

Rack enclosures and open frame racks
for server and networking applications
in IT environments



TABLE OF CONTENTS

ENCLOSURES

NetShelter® VX 2

The optimal enclosure for your entire IT environment including servers, networking, and storage devices

NetShelter® VS 6

900mm (35.5in.) deep rack enclosures with advanced cooling and security features for server, networking, and telecom applications in IT environments

NetShelter® WX 8

Wall-mounted rack enclosures for networking applications in IT environments

OPEN FRAME RACKS

NetShelter® 2-Post Rack 9

2-post racks for networking applications in IT environments

NetShelter® 4-Post Rack 10

4-post racks with advanced power distribution and cable management features for server, networking, and telecom applications in secure IT environments

ACCESSORIES

Enclosure and Rack Accessories 11

Power distribution, cooling, and cable management accessories, shelving, grounding, keyboards, keyboard drawers, LCD monitors, KVM switches, security devices, stabilization accessories required for a complete rack solution

Cooling 12

Power Distribution 13

Cable Management 14

Grounding Kit 15

Keyboards and drawers 15

KVM switches 15

LCD monitors 15

Rack Mounting Hardware 16

Security Devices 16

Shelving 17

Stabilization 17

Troughs and Ladders 18

Accessory Compatibility Chart 19

“Fits Like a Glove” NetShelter® VX Guaranteed Compatibility



Whether you are designing a wiring closet or the largest data center, or just looking for the most flexible rack solution,

APC NetShelter® VX rack enclosures provide a secure and vendor-neutral environment for your IT equipment.

APC is committed to ensuring that your rack-mount equipment will fit into NetShelter VX enclosures. APC guarantees that all 19" EIA-310-D compliant equipment will physically fit into NetShelter VX enclosures with the mounting hardware provided by the original equipment manufacturer (OEM), APC, a third party vendor, or any combination thereof or your money back.*

X-Certified

NetShelter® VX rack enclosures and accessories are X-certified, meaning they are tested and certified for use with InfraStruXure™ architecture.

InfraStruXure is on-demand architecture for power, cooling and environmental management. An effective solution to network-critical physical infrastructure (NCPI), InfraStruXure is the industry's only integrated architecture robust enough to effectively maintain highly available and manageable networks. Look for the words (X-CERTIFIED) and the “Fits like a glove” icon throughout this brochure to determine which racks and accessories are compatible with APC InfraStruXure architecture.

*See www.apc.com for more details.

Every product carrying this mark has been tested and certified for use with InfraStruXure architecture. Before you buy, check for the “X” to guarantee product compatibility.



Service Availability a High Priority for Silicon Valley ASP/ISP

"The NetShelter™ product is a great example of APC's innovation. Before NetShelter, if you wanted to have a rack system, it would take 3 days just to assemble a parts list. It was a nightmare. Then APC came along . . ."



Andrew Percy,
President,
Puzzle Solutions



Once concerned with environmental design at the room-level, consulting engineers now direct their attention to power distribution, cooling, and cable management at the rack level. The driving force behind this shift is technology compaction, as today's IT equipment is designed with efficient rack-mounting capabilities to maximize the utilization of valuable floor space.

The ideal rack enclosure maximizes flexibility with a progressive, non-proprietary feature-set as well as an extensive line of scalable accessory products to address current

needs and adapt to future technology trends. APC NetShelter® rack systems provide the most progressive feature-set available in a vendor-neutral rack environment while allowing the user the flexibility to quickly adapt to emerging trends. Available in a variety of heights, widths, and depths, NetShelter racks and enclosures support applications ranging from branch offices and wiring closets to enterprise data centers. With an extensive line of leading-edge power distribution, cooling and cable management accessories, APC offers the most comprehensive rack solutions to protect the critical components of the IT environment.

NetShelter® VX

The optimal enclosure for your entire IT environment including servers, networking, and storage devices.

NetShelter® VX is APC's leading-edge enclosure solution. NetShelter® VX addresses many of the emerging trends and issues IT managers face today by incorporating new features and benefits that allow customers to create a more effective IT environment. Increasing server depths combined with the requirement for more effective cable management and power distribution has led to a need for deeper enclosures. Increasing power densities have led to a need for enclosures that provide superior ventilation. Varying IT requirements have led to a need for a more robust offering of enclosure sizes and options. The desire for quick deployment of IT solutions has led to a need for enclosure solutions that are easy to use and install. NetShelter® VX enclosures have been designed with all of these trends in mind.

Compatibility

- Door ventilation exceeds 830 in² (5355 cm²)
- Adjustable mounting depth [fig 3a]
- Guaranteed compatibility

Convenience

- Rear cable management channels
- Rear power distribution channels
- Top and bottom cable access
- Numbered U positions [fig 3b]
- Optimized depth
- Optimized width
- Rolls through a 2,10m (7 foot) doorway
- Ships fully assembled
- Simple selection

Safety

- UBC Zone 4 Stabilization provisions

Protection

- Lockable doors and side panels
- Door access monitoring
- Structural stability
- Shipping pallet
- Protective grounding provisions

Serviceability

- Quick release doors [fig 3c]
- Quick release side panels [fig 3d]
- Split rear doors [fig 3e]

Adaptability

- Reversible doors
- Easily expanded upon to create complete rows of enclosures



[fig 3a]




[fig 3b]



[fig 3c]



[fig 3d]




[fig 3e]



Every product carrying this mark has been tested and certified for use with InfraStruXure architecture. Before you buy, check for the "X" to guarantee product compatibility.

POWER DISTRIBUTION FEATURES

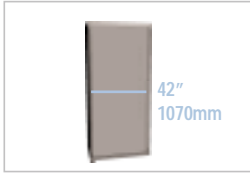

Increased depth of 42 inches (1070mm) to provide space for power distribution and cable management




Split rear doors for easy access to power outlets




Recessed power distribution channels and a full line of basic, metered and switched PDUs



Toolless mounting of vertical rack PDU's.

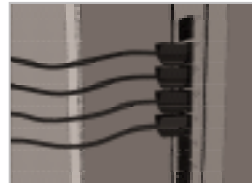


Up to 42 easily accessible outlets handle high densities of up to 7.2kW per PDU. For redundancy, mount second PDU in opposite recessed power channel.

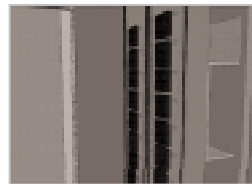

For redundancy with separation of data and power cables mount two PDUs side-by-side.

COOLING OPTIONS

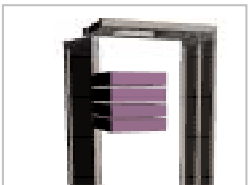


The optional Air Distribution Unit delivers equalized airflow from the bottom to the top of the rack enclosure.




The optional Air Removal Unit optimizes heat removal from densely configured racks


CABLE MANAGEMENT

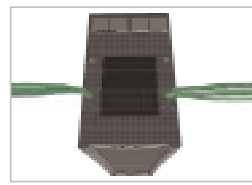


Integrated top cable access

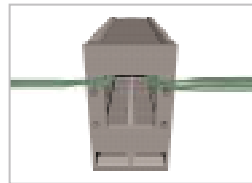

Integrated bottom cable access

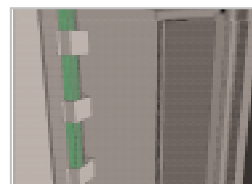

Integrated rear cable management with ability to route cables between bayed enclosures, and optional cable containment brackets

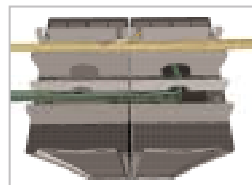

Optional overhead cable management with power troughs and data partitions

NetShelter® VX 42U Enclosure (X-CERTIFIED)

Black 42U Enclosure:
AR2100BLK



Black 42U Enclosure
without sides:
AR2101BLK



	AR2100BLK	AR2101BLK
Net Weight	359.00 lbs (163.18 kg)	282.00 lbs (128.18 kg)
Net Height	81.50 inches (207.01 cm)	81.50 inches (207.01 cm)
Net Width	23.50 inches (59.69 cm)	23.00 inches (58.42 cm)
Net Depth	42.20 inches (107.19 cm)	42.20 inches (107.19 cm)
Shipping Weight	397.00 lbs (180.45 kg)	320.00 lbs (145.45 kg)
Shipping Height	87.00 inches (220.98 cm)	87.00 inches (220.98 cm)
Shipping Width	29.50 inches (74.93 cm)	29.50 inches (74.93 cm)
Shipping Depth	47.50 inches (120.65 cm)	47.50 inches (120.65 cm)
Weight Capacity (static load)	2000.00 lbs (907.18 kg)	2000.00 lbs (907.18 kg)
Weight Capacity (dynamic load)	2000.00 lbs (907.18 kg)	2000.00 lbs (907.18 kg)

NetShelter® VX 42U Open Frame (X-CERTIFIED)



Black 42U Open Frame:
AR2102BLK

	AR2102BLK
Net Weight	204.00 lbs (92.73 kg)
Net Height	81.50 inches (207.01 cm)
Net Width	23.00 inches (58.42 cm)
Net Depth	42.20 inches (107.19 cm)
Shipping Weight	250.00 lbs (113.64 kg)
Shipping Height	87.00 inches (220.98 cm)
Shipping Width	29.50 inches (74.93 cm)
Shipping Depth	47.50 inches (120.65 cm)
Weight Capacity (static load)	2000.00 lbs (907.18 kg)
Weight Capacity (dynamic load)	2000.00 lbs (907.18 kg)

NetShelter® VX 25U Enclosure



Black 25U Enclosure:
AR2105BLK

	AR2105BLK
Net Weight	255.00 lbs (119.91 kg)
Net Height	51.70 inches (131.32 cm)
Net Width	23.50 inches (59.69 cm)
Net Depth	42.20 inches (107.19 cm)
Shipping Weight	301.00 lbs (136.82 kg)
Shipping Height	57.30 inches (145.54 cm)
Shipping Width	29.50 inches (74.93 cm)
Shipping Depth	47.50 inches (120.65 cm)
Weight Capacity (static load)	2000.00 lbs (907.18 kg)
Weight Capacity (dynamic load)	2000.00 lbs (907.18 kg)

NetShelter® VX 47U Enclosure (X-CERTIFIED)

Black 47U enclosure:
AR2103BLK



Black 47U enclosure without sides:
AR2104BLK



	AR2103BLK	AR2104BLK
Net Weight	386.00 lbs (175.45 kg)	291.00 lbs (132.27 kg)
Net Height	90.25 inches (229.24 cm)	90.25 inches (229.24 cm)
Net Width	23.00 inches (58.42 cm)	23.00 inches (58.42 cm)
Net Depth	42.20 inches (107.19 cm)	42.20 inches (107.19 cm)
Shipping Weight	438.00 lbs (199.09 kg)	343.00 lbs (155.91 kg)
Shipping Height	96.00 inches (243.84 cm)	96.00 inches (243.84 cm)
Shipping Width	29.50 inches (74.93 cm)	29.50 inches (74.93 cm)
Shipping Depth	47.50 inches (120.65 cm)	47.50 inches (120.65 cm)
Weight Capacity (static load)	2000.00 lbs (907.18 kg)	2000.00 lbs (907.18 kg)
Weight Capacity (dynamic load)	2000.00 lbs (907.18 kg)	2000.00 lbs (907.18 kg)

NetShelter® VX Wide 42U Enclosure (X-CERTIFIED)

Black wide enclosure:
AR2310BLK



Black wide enclosure without sides:
AR2311BLK



	AR2310BLK	AR2311BLK
Net Weight	372.00 lbs (169.09 kg)	294.00 lbs (133.64kg)
Net Height	81.50 inches (207.01 cm)	81.50 inches (207.01 cm)
Net Width	29.50 inches (74.93 cm)	29.50 inches (74.93 cm)
Net Depth	42.20 inches (107.19 cm)	42.20 inches (107.19 cm)
Shipping Weight	427.00 lbs (194.09 kg)	351.00 lbs (159.55 kg)
Shipping Height	87.00 inches (220.98 cm)	87.00 inches (220.98 cm)
Shipping Width	35.50 inches (90.17 cm)	35.50 inches (90.17 cm)
Shipping Depth	47.50 inches (120.65 cm)	47.50 inches (120.65 cm)
Weight Capacity (static load)	2000.00 lbs (907.18 kg)	2000.00 lbs (907.18 kg)
Weight Capacity (dynamic load)	2000.00 lbs (907.18 kg)	2000.00 lbs (907.18 kg)

NetShelter® VS

900mm (35.5in.) deep rack enclosures with advanced cooling and security features for server, networking, and telecom applications in IT environments

NetShelter® VS is APC's performance-based enclosure solution, ideal for medium density data centers where floor space is of utmost importance. NetShelter® VS maintains the same high density cooling and security features as VX with limited space for power distribution and cable management in cutting-edge server applications. Increasing power densities have led to a need for enclosures that provide superior ventilation. The desire for quick deployment of IT solutions has led to a need for enclosure solutions that are easy to use and install. NetShelter® VS enclosures have been designed with all of these trends in mind.

Compatibility

- Door ventilation exceeds 830 in² (5355 cm²) [fig a]
- Adjustable mounting depth [fig b]

Convenience

- Numbered U positions [fig c]
- Rolls through a 2.10 m (7 foot) doorway
- Ships fully assembled
- Simple selection, complete enclosures with single part numbers
- Optimized width

Adaptability

- Reversible doors
- Easily expanded upon to create complete rows of enclosures

Protection

- Lockable doors and side panels
- Structural stability

Safety

- UBC Zone 4 stabilization provisions
- Protective grounding provisions

Serviceability

- Quick release doors [fig d]
- Quick release side panels [fig e]
- Split rear doors [fig f]



[fig a]



[fig b]



[fig c]



[fig d]



[fig e]



[fig f]



NetShelter® VS 42U Enclosure

Black 42U Enclosure:
AR2800BLK



Black 42U Enclosure without
sides: AR2801BLK



Also available in beige.

	AR2800BLK	AR2801BLK
Net weight	295.00 lbs (134.09 kg)	237.00 lbs (107.73 kg)
Net Height	81.50 inches (207.01 cm)	81.50 inches (207.01 cm)
Net Width	23.50 inches (59.69 cm)	23.00 inches (58.42 cm)
Net Depth	35.50 inches (90.17 cm)	35.50 inches (90.17 cm)
Shipping Weight	341.00 lbs (155.00 kg)	283.00 lbs (128.64 kg)
Shipping Height	87.00 inches (220.98 cm)	87.00 inches (220.98 cm)
Shipping Width	29.50 inches (74.93 cm)	29.50 inches (74.93 cm)
Shipping Depth	47.50 inches (120.65 cm)	47.50 inches (120.65 cm)
Weight Capacity (static load)	2000.00 lbs (907.18 kg)	2000.00 lbs (907.18 kg)
Weight Capacity (dynamic load)	2000.00 lbs (907.18 kg)	2000.00 lbs (907.18 kg)

NetShelter® VS 42U Open Frame



Black 42U Open Frame:
AR2802BLK

	AR2802BLK
Net weight	163.00 lbs (74.09 kg)
Net Height	81.50 inches (207.01 cm)
Net Width	23.00 inches (58.42 cm)
Net Depth	35.50 inches (90.17 cm)
Shipping Weight	209.00 lbs (95.00 kg)
Shipping Height	87.00 inches (220.98 cm)
Shipping Width	29.50 inches (74.93 cm)
Shipping Depth	47.50 inches (120.65 cm)
Weight Capacity (static load)	2000.00 lbs (907.18 kg)
Weight Capacity (dynamic load)	2000.00 lbs (907.18 kg)

NetShelter® VS 25U Enclosure



Black 25U Enclosure:
AR2805BLK

Also available in beige.

	AR2805BLK
Net weight	245.00 lbs (111.36 kg)
Net Height	51.70 inches (131.32 cm)
Net Width	23.50 inches (59.69 cm)
Net Depth	35.50 inches (90.17 cm)
Shipping Weight	300.00 lbs (136.36 kg)
Shipping Height	57.30 inches (145.54 cm)
Shipping Width	29.50 inches (74.93 cm)
Shipping Depth	47.50 inches (120.65 cm)
Weight Capacity (static load)	2000.00 lbs (907.18 kg)
Weight Capacity (dynamic load)	2000.00 lbs (907.18 kg)

NetShelter® WX

Wall-mounted rack enclosures for networking applications in IT environments

NetShelter® WX Enclosures are specifically designed for networking professionals to securely store and wire 19" EIA compatible equipment such as hubs, routers, concentrators and patch panels. Typical applications include small hub and LAN applications within wiring closets and computer rooms with floor space constraints. The NetShelter® Wall-Mount Enclosure mounts directly to building walls without occupying valuable or unavailable floor space. Rubber feet are provided with the enclosure for those applications that require floor mounting.

Convenience

- Wall-mountable
- Multi-purpose mounting rails
- Adjustable front rail
- Integrated cable access holes
- Labeled U positions
- Unit symmetry allows left or right hand door swing operation

Availability

- Ventilation front doors and side panels

Serviceability

- Quick release doors

Protection

- Lockable doors



NetShelter® WX Wall-Mount Enclosure 13U Glass Door



Black 13U Enclosure with glass front door:
AR100

	AR100
Net Weight	94.00 lbs (42.73 kg)
Net Height	25.75 inches (65.41 cm)
Net Width	23.00 inches (58.42 cm)
Net Depth	24.50 inches (62.23 cm)
Shipping Weight	115.00 lbs (52.27 kg)
Shipping Height	33.00 inches (83.82 cm)
Shipping Width	27.00 inches (68.58 cm)
Shipping Depth	30.50 inches (77.47 cm)
Weight Capacity (static load)	100.00 lbs (45.36 kg)

NetShelter® WX Wall-Mount Enclosure 13U Vented Door



Black 13U Enclosure with vented door:
AR100HD

	AR100HD
Net Weight	94.00 lbs (42.73 kg)
Net Height	25.75 inches (65.41 cm)
Net Width	23.00 inches (58.42 cm)
Net Depth	24.50 inches (62.23 cm)
Shipping Weight	115.00 lbs (52.27kg)
Shipping Height	33.00 inches (83.82 cm)
Shipping Width	27.00 inches (68.58 cm)
Shipping Depth	30.50 inches (77.47 cm)
Weight Capacity (static load)	100.00 lbs (45.36 kg)


NetShelter® 2-Post Open Frame Racks

2-post racks for networking applications in IT environments

The NetShelter® 2-Post Rack offers a quality solution for the economical installation of rack-mountable networking equipment. The 2-Post Rack offers cost conscious customers a simple solution for rack mounting network equipment in a secure managed environment including data centers, wiring closets and co-location facilities. Each NetShelter® 2-Post Rack is made with high grade aluminum extrusions and offers a generous 45U (78.75" or 200cm) of equipment mounting space in a 2.15 m high design. The self-squaring design makes assembly quick and easy and requires only one person to fully assemble each unit.

2-post rack features

- 6061-T6 Structural grade aluminum: High quality aluminum ensures product durability
- Self squaring design: Allows for fast and easy installation

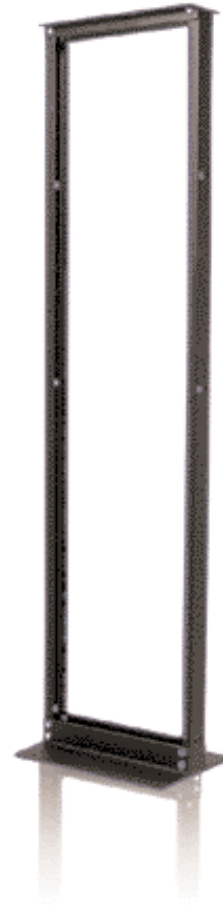

2-Post Rack

2-Post Rack with Aluminum finish: AR200

2-Post Rack with black finish: AR201




AR200, AR201

Net Weight	26.00 lbs (11.82 kg)
Net Height	83.50 inches (212.09 cm)
Net Width	20.20 inches (51.31 cm)
Net Depth	14.80 inches (37.59 cm)
Shipping Weight	30.00 lbs (13.64 kg)
Shipping Height	86.00 inches (218.44 cm)
Weight Capacity (static load)	750.00 lbs (340.19 kg)

NetShelter® 4-Post Open Frame Racks

4-post racks with advanced power distribution and cable management features for server, networking, and telecom applications in secure IT environments.

APC 4-Post Open Frame Racks provide simple, low cost mounting means for rack-mount equipment in IT environments. Ideal for rack-mount servers, networking, and telecom equipment where security at the individual rack level is not required, open frame racks provide unobstructed airflow and fast, easy access to installed equipment. Provisions for vertically mounting APC Rack PDUs in the rear combined with options for easily routing, organizing, and storing large bundles of cables make APC 4-Post Open Frame Rack solutions the best alternative on the market.

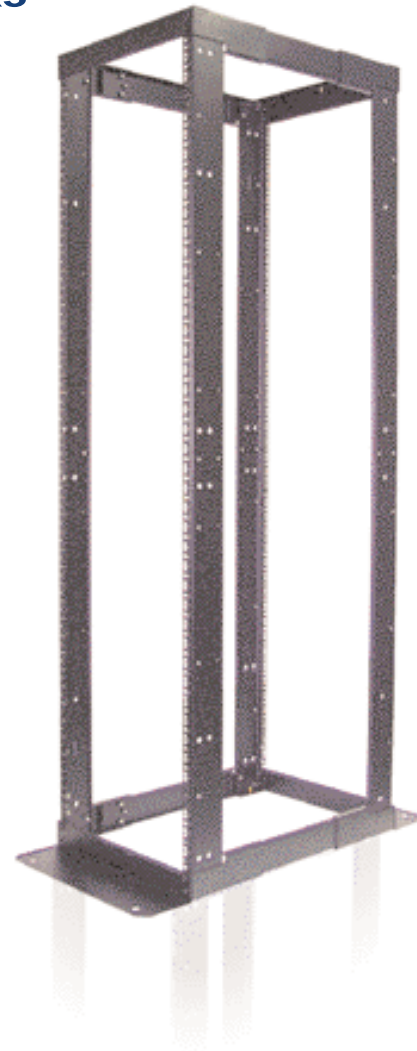

4-post rack features

- Numbered U positions
- Optimized width
- Reversible stabilization plates

4-Post Open Frame Rack (X-CERTIFIED)

4-Post Rack with square holes, black finish: AR203

4-Post Rack with threaded holes, black finish: AR204



AR203, AR204

Net Weight	92.00 lbs (41.82 kg)
Net Height	80.90 inches (205.49 cm)
Net Width	20.60 inches (52.32 cm)
Net Depth	29.50 inches (74.93 cm)
Shipping Weight	102.00 lbs (46.36 kg)
Shipping Height	82.00 inches (208.28 cm)
Shipping Width	10.00 inches (25.40 cm)
Shipping Depth	7.40 inches (18.80 cm)
Weight Capacity (static load)	1000.00 lbs (453.59 kg)

Rack Air Distribution Unit

Air distribution for power dense enclosures and low pressure areas

The Rack Air Distribution Unit is a 2U fan unit that works with an existing precision air conditioning system to deliver cool air to the equipment contained in a rack enclosure. The Rack Air Distribution Unit connects into the raised floor and pulls supply air directly into the enclosure. This prevents the conditioned air from mixing with warmer room air before reaching the equipment.

The Rack Air Distribution Unit minimizes temperature differences between the top and bottom of the enclosure. It also prevents hot exhaust air from recirculating to the inlet of the enclosure.

The product is recommended for rack enclosures with loads greater than 1.5kW and can provide airflow for loads up to 3.0kW. It is also ideal for enclosures in raised floor environments where underfloor air distribution is inadequate.



ACF001	(115VAC, 60HZ)
ACF002	(230VAC, 50HZ)
ACF003	(100VAC, 50/60HZ)

Rack Air Removal Unit

Heat removal for high density enclosures

Densely packed enclosures can overheat IT equipment and cause downtime. High density enclosures create an environment where traditional air distribution methods are not effective. The Air Removal Unit captures exhaust heat, ducting it to the return air plenum and eliminating hot spots. Through automatic fan speed adjustment based on temperature or power consumption, a desired temperature can be set and fans will self-adjust for optimal energy efficiency.

The Rack Air Removal Unit can cool up to a 7.5 kW rack and provide fan redundancy up to 5.0 kW, as well as provide power redundancy through dual corded input. This space saving product mounts to the back of the enclosure - requiring zero U space.



ACF101BLK	(115VAC, 60HZ)
ACF102BLK	(230VAC, 50HZ)
ACF120	ARU DUCTING KIT
ACF122	ARU DOOR GRILLE KIT

FAN TRAYS




Roof Fan Tray (120, 208, 230 VAC) Black
AR8210BLK (120 VAC), AR8211BLK (208, 230 VAC)
(X-CERTIFIED)

Occupies 0U of rack space, Integrated cable access holes, promotes bottom to top airflow. Includes Installation Guide, mounting hardware, Qty 1 - IEC to IEC 320 Power Cord.



Roof Fan Tray Baffle Plates for NetShelter VX 750mm Wide
AR8212BLK (X-CERTIFIED)

Promotes bottom to top airflow. Includes Installation Guide, mounting hardware.



Wall-Mount Ventilation Plate
AR8355

Ventilated. Includes Installation Guide.



Wall-Mount Fan Tray 120, 230 VAC Black
AR8206BLK (120 VAC), AR8207BLK (230 VAC)

Occupies 1U of rack space, promotes bottom to top airflow. Includes Installation Guide, Qty 1 - IEC to NEMA 5-15P Power Cord (120V), IEC to IEC 320 Power (230V) Cord; Qty 2 - Fans.

BLANKING PANELS



Blanking Panel Kit (1U, 2U, 4U, 8U)
AR8101BLK (Black) (X-CERTIFIED)

Covers open rack space to ensure proper airflow, promotes proper airflow. Includes mounting hardware. Qty 1 each: 1U, 2U, 4U and 8U Panel.



Blanking Panel Kit (1U, 2U, 4U, 8U) 23"
AR8107BLK (X-CERTIFIED)

Covers open rack space to ensure proper airflow, Promotes proper airflow. Includes mounting hardware, Qty 1 each: 1U and 2U and 4U and 8U Panel.



1U Blanking Panel Kit (Qty 2) 19"
AR8108BLK (X-CERTIFIED)

Covers open rack space to ensure proper airflow. Includes mounting hardware, Qty 2 - 1U Panels.



2U Blanking Panel Kit (Qty 2) 19"
AR8109BLK (X-CERTIFIED)

Covers open rack space to ensure proper airflow. Includes mounting hardware, Qty 2 - 2U Panels.



4U Blanking Panel Kit (Qty 2) 19"
AR8134BLK (X-CERTIFIED)

Covers open rack space to ensure proper airflow. Includes mounting hardware, Qty 2 - 4U Panels.



8U Blanking Panel Kit (Qty 2) 19"
AR8135BLK (X-CERTIFIED)

Covers open rack space to ensure proper airflow. Includes mounting hardware, Qty 2 - 8U Panels.

To determine which cooling accessories are compatible with specific models of NetShelter enclosures and racks, check the Accessory Compatibility Chart on page 18-19.

ACCESSORIES: POWER DISTRIBUTION

Basic Rack PDUs

APC offers a wide variety of Basic Rack Power Distribution



Units (PDUs), which allow users to distribute power outlets to rack-mount equipment. Horizontal and vertical units are available as well as a variety of power inputs and outputs to fit most power environments. APC now offers Basic Rack PDUs that mount vertically, without tools in the rear channel of a NetShelter VX.

Basic Vertical Rack PDU, Zero U, 16A 230V, Input: IEC 309, Output: (20)IEC 320 C13, (4) IEC 320 C19
AP7551

Basic Vertical Rack PDU, Zero U, 16A 230V, Input: IEC 320 C20, Output: (20)IEC 320 C13, (4) IEC 320 C19
AP7552

Basic Horizontal Rack PDU, One U, 16A 208/230V, Input: IEC 320 C20, Output: (12)IEC 320 C13
AP9565

Basic Vertical Rack PDU, Zero U, 16A 208/230V, Input: IEC 320 C20, Output: (14)IEC 320 C13
AP9554

Basic Horizontal Rack PDU, One U, 16A 208/230V, Input: IEC 320 C20, Output: (10)IEC 320 C13, (2)IEC 320 C19
AP9559

Basic Vertical Rack PDU, Zero U, 10A 208/230V, Input: IEC 320 C14, Output: (15)IEC 320 C13
AP9568

Cord retention bracket for Basic Rack PDU
AP9569

Metered Rack PDUs

APC's Metered Rack Power Distribution Units (PDUs) provide power distribution as well as equips on-site installers with the ability to monitor the aggregate current draw as equipment is connected to the unit. These Metered Rack PDUs also have alarm thresholds that when exceeded provide alarms to alert users of potential problems. These features help eliminate the possibility of an overloaded circuit. Units listed below include installation guide, rack mounting brackets, toolless mounting kit, and user manual.



Metered Horizontal Rack PDU, Two U, 16A 230V, Input: IEC 309, Output: (11)IEC 320 C13, (2)IEC 320 C19
AP7611

Metered Vertical Rack PDU, Zero U, 10A 230V, Input: IEC C14, Output: (16)IEC 320 C13
AP7850*

Metered Vertical Rack PDU, Zero U, 16A 230V, Input: IEC 309, Output: (20)IEC 320 C13, (4)IEC 320 C19
AP7851

Metered Vertical Rack PDU, Zero U, 16A 230V, Input: IEC 320 C20, Output: (20)IEC 320 C13, (4)IEC 320 C19
AP7852

* will be available in Q2

Switched Rack PDUs

APC's Switched Rack Power



Distribution Units (PDUs) are premium solutions to many of the power management problems seen in today's IT environments. Some of the problems are unauthorized use of power outlets, locked-up equipment, in-rush current, overloaded circuits, and the need of remote access to power outlets in the rack. Users can access, configure, and control the Switched Rack PDUs through Web, SNMP, or Telnet Interfaces.

Switched Horizontal Rack PDU, One U, 12A 208/230V, Input: IEC 320 C14, Output: (8)IEC 320 C13
AP7920 (X-Certified)

Switched Horizontal Rack PDU, One U, 10A 208/230V, Input: IEC 320 C20, Output: (8)IEC 320 C13
AP7921 (X-Certified)

Switched Vertical Rack PDU, Zero U, 16A 230V, Input: IEC 309, Output: (21)IEC 320 C13, (3)IEC 320 C19
AP7951

Switched Vertical Rack PDU, Zero U, 10A 230V, Input: IEC C14, Output: (16)IEC 320 C13
AP7950*

Switched Vertical Rack PDU, Zero U, 16A 230V, Input: IEC 20, Output: (20)IEC 320 C13, (4)IEC 320 C19
AP7952

* will be available in Q2

Dual PDU Mounting Brackets 600mm wide AR8011BLK (X-CERTIFIED)

Provides mounting option for PDUs. Includes Installation Guide, Mounting hardware, Qty 2 - Brackets.

Dual PDU Mounting Brackets 750mm wide AR8012BLK (X-CERTIFIED)

Provides mounting option for PDUs. Includes Installation Guide, Mounting hardware, Qty 2 - Brackets.

PDU Compatibility with APC Enclosures and Racks

Part number	AR2100 AR2101 AR2102	AR2103 AR2104	AR2105	AR2310BLK AR2311BLK	AR2800 AR2801 AR2802	AR2805	AR100 AR100HD	AR200 AR201	AR203 AR204
Basic Rack PDUs									
AP9554	■	■	■	■	■	■	■	■	■
AP9559	■	■	■	■	■	■	■	■	■
AP9565	■	■	■	■	■	■	■	■	■
AP9568	■	■	■	■	■	■	■	■	■
AP7551	■	■		■	■			■	■
AP7552	■	■		■	■			■	■
Metered Rack PDUs									
AP7611	■	■	■	■	■	■		■	■
AP7850	■	■		■	■				■
AP7852	■	■		■	■				■
AP7851	■	■		■	■				■
Switched Rack PDUs									
AP7620	■	■	■	■	■	■			
AP7921	■	■	■	■	■	■			
AP7950	■	■		■	■				■
AP7951	■	■		■	■				■

Brackets

Bracket Kit, Zero U, Compaq/Dell
AP7400
Bracket Kit, Zero U, IBM NetBay
AP7402
Bracket Kit, Zero U, Sun Rack 900
AP7404

Power cord


IEC C13 to IEC C14
AP9870
IEC C19 to IEC 309
AP9876
IEC C19 to IEC C14
AP9878

For other versions of Power Cords, please contact APC

Can't find the SKU you need? For a complete listing of all available products, please go to www.apc.com.

Cable Management

As the number of IT components within each rack enclosure continues to increase, so do the number of power and data cables. Traditionally, overhead cable trays and under-floor cabling systems limit flexibility and adaptability. Under-floor plenum material is costly and resource-intensive to install, and under-floor branch circuits can negatively effect air distribution.

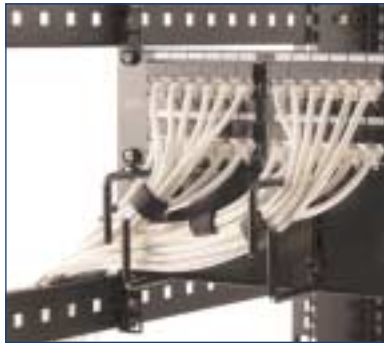

Recognizing these challenges, APC responded with a comprehensive selection of optional components that allows users to pick the ideal cable management solution for their particular IT environment. Accessories such as shielded power cable troughs and data partitions create self-contained cabling, eliminating the need to use space under a raised floor and permitting better organization in non-raised floor environments.

CABLE MANAGEMENT



Side Channel Cable Trough Black
AR8008BLK (X-CERTIFIED)

Adjustable mounting depth, facilitates side cable management, tool-less mounting. Includes Installation Guide, Velcro Mounting Straps.



Cable Management Rings
AR8113A (X-CERTIFIED)

Facilitates side/vertical cable management. Organizes data and power cables. Includes Mounting hardware, Velcro Mounting Straps.



Side Cable Management Tray (Qty 2)
AR8114BLK (X-CERTIFIED)

Facilitates side/vertical cable management. Integrated number pad. Organizes data and power cables. Includes Installation Guide, Mounting hardware, Velcro Mounting Straps.



Cable Containment Brackets
AR8116BLK (X-CERTIFIED)

Facilitates rear/vertical cable management. Organizes data and power cables. Provides mounting option for PDUs. Includes 4 Flat Brackets, Installation Guide, Mounting hardware, Qty 4 C brackets.



Rear Cable Management Tray 42U & 47U

AR8118BLK (X-CERTIFIED)
AR8119BLK (X-CERTIFIED)

Facilitates rear/vertical cable management. Organizes data and power cables. Includes Installation Guide, Mounting hardware, Qty 1 - Tray, Velcro Mounting Straps.



Cable Management Arm

AR8129 (X-CERTIFIED)

Organizes data and power cables. Includes Installation Guide, Mounting hardware, Velcro Mounting Straps.



1U and 2U Horizontal Cable Organizer

AR8425A, AR8426A (X-CERTIFIED)

Facilitates front cable management. Integrated front cable hoops. Occupies 1U of rack space. Includes Installation Guide, Mounting hardware.



2U Patch Cord Organizer Black

AR8427A (X-CERTIFIED)

Facilitates front cable management. Integrated front cable hoops. Occupies 2U of rack space. Includes Installation Guide, Mounting hardware.



1U Cable Pass-Thru w/Brush Strip Black

AR8429 (X-CERTIFIED)

Includes Mounting hardware.



2U Horizontal Cable Organizer w/ Pass-Thru

AR8428 (X-CERTIFIED)

Includes Mounting hardware.



Patch Panels

21055-12,24,32,48,72 or 96 (X-CERTIFIED)

Patch panels, manufactured to industry standards, keep your network up and running, available from 12 ports to 96 ports RJ-45.



Network Patch Cables

(X-CERTIFIED)

High quality networking cables keep your network up and running

To determine which accessories are compatible with specific models of NetShelter enclosures and racks, check the Accessory Compatibility Chart on page 18-19.

ACCESSORIES

GROUNDING KIT

NetShelter Grounding Kit

AR8390 (X-CERTIFIED)

Reduces electromagnetic emissions. Includes mounting hardware, Qty. 18 6in/15cm grounding straps, Qty. 6 12in/30cm grounding straps.



KEYBOARDS AND DRAWERS

17" Keyboard Drawer

AR8126A (beige),
AR8126ABLK (X-CERTIFIED)

4 Post Mounting. Accommodates 17 inch keyboards. Adjustable mounting depth. Allows for rear mounting of 1U device. Integrated wrist rest. Includes Installation Guide, mounting hardware.



19" Rotating Keyboard Drawer

AR8127, AR8127BLK (X-CERTIFIED)

4 Post Mounting. Adjustable mounting depth. Designed for standard desktop keyboards. Occupies 2U of rack space. Includes Cable Management Clips, Installation Guide, mounting hardware, mouse pad, wrist rest.



LCD MONITORS

LCD Monitors

AR8215 (Beige),
AR8215BLK (Black) (X-CERTIFIED)

Features 1024 X 768 maximum resolution, 15" TFT active matrix screen, adjustable mounting depth, energy saver, full size keyboard, integrated trackball, low cooling requirements, low power consumption, occupies 1U of rack space, on-screen display (OSD) adjustments, PC mouse/keyboard/ video support, PS/2 terminations, Standard VGA termination. Includes Cable management arm, mounting hardware, Qty 1 - IEC to IEC 320 power cord, Qty 1 - IEC to NEMA 5-15P power cord, User Manual.



KVM SWITCHES

8 Port KVM Switch (PC Only)

AP9258 (X-CERTIFIED)

Automatic scanning feature, cascading capabilities, hot pluggable operation, keep alive function, Microsoft Intellimouse support, mouse reset function, on-screen display (OSD) capability, password security, PC mouse/keyboard/video support, push button or keyboard switching, scanning capabilities, Status Indicator LED's, Universal input voltage range, Video modes up to 1600 x 1200 at 72Hz. Includes Rack Mounting Brackets, User Manual.



8 Port KVM Switch PC (USB & PS/2) and Sun Compatible

AP9278 (X-CERTIFIED)

Automatic scanning feature, cascading capabilities, hot pluggable operation, keep alive function, Microsoft Intellimouse support, mouse reset function, multi-platform support, on-screen display (OSD) capability, password security, PC mouse/keyboard/video support, push button or keyboard switching, scanning capabilities, status indicator LED's, video modes up to 1600 x 1200 at 72Hz. Includes Rack Mounting Brackets, User Manual.



4 Port KVM Switch (PC Only)

AP9254 (X-CERTIFIED)

Automatic scanning feature, cascading capabilities, hot pluggable operation, keep alive function, Microsoft Intellimouse support, mouse reset function, on-screen display (OSD) capability, password security, PC mouse/keyboard/video support, push button or keyboard switching, scanning capabilities, status indicator LED's, universal input voltage range, video modes up to 1600 x 1200 at 72Hz. Includes Rack Mounting Brackets, User Manual.



To determine which accessories are compatible with specific models of NetShelter enclosures and racks, check the Accessory Compatibility Chart on page 18-19.

RACK MOUNTING HARDWARE

10-32 Hardware Kit

AR8005 (X-CERTIFIED)

Additional hardware for mounting equipment. Includes Qty 36 #10-32 caged nuts.

Equipment Support Rails

AR8006 (X-CERTIFIED)


4 post mounting, occupies 0U of rack space. Includes Installation Guide, Mounting hardware.



hp Adapter Kit - L Class/RP54xx Series

AR8013 (X-CERTIFIED)

Includes Installation Guide, Qty 2 - Brackets.



hp Adapter Kit - N Class/RP7400

AR8014 (X-CERTIFIED)

Includes Installation Guide, Qty 2 - Brackets.



M6 Hardware Kit for 750mm Wide Enclosures

(X-CERTIFIED)

AR8015

Additional hardware for mounting equipment. Includes Qty 32 sets of M6 caged nuts and nylon washers and slot/Philips screws.



M6 Hardware Kit

AR8100 (X-CERTIFIED)

Additional hardware for mounting equipment. Includes Qty 32 sets of M6 caged nuts and nylon washers and slot/Philips screws.



Adapter Kit 23" to 19" Mounting

AR8150BLK (X-CERTIFIED)

Allows 19 inch equipment to be mounted in 23 inch configuration. Occupies 1U of rack space. Includes Mounting hardware, Qty 4 - Brackets.



SECURITY DEVICES

Door Switch Kit

AP9513 (X-CERTIFIED)

Advanced security, interior and exterior mounting capabilities. Includes User Manual.



Combination Lock Handle

AR8132 (X-CERTIFIED)

Master key override, three digit thumbwheel combination, user configurable combination. Includes Installation Guide.



NetShelter VS 42U Privacy Panel (Qty 2)

AR8339BLK

Promotes proper airflow, provides security between enclosures when bayed together. Includes Installation Guide.



NetShelter VX 42U Privacy Panel (Qty 2)

AR8349BLK (X-CERTIFIED)

Promotes proper airflow, provides security between enclosures when bayed together. Includes Installation Guide.



NetShelter® Configurator

APC's new Web-based NetShelter Configurator allows you to create a rack environment with a high level of availability by helping you more effectively plan the integration of servers, storage devices, networking equipment, and APC products. Without having to download software onto your PC, you can configure a NetShelter enclosure with equipment offered by major server and networking equipment manufacturers.

To try out the NetShelter® Configurator, go to <http://www.apc.com/products/netshelter/configurator>

ACCESSORIES

SHELVING

Fixed Shelf 50lbs/22.7kg

AR8105 (Beige), AR8105BLK (Black) (X-CERTIFIED)

Occupies 2U of rack space, ventilated, cantilever (2 post) mount. Includes Installation Guide, mounting hardware.



Fixed Shelf 250lbs/114kg

AR8122 (Beige), AR8122BLK (Black) (X-CERTIFIED)


Occupies 1U of rack space, 4 post mounting, adjustable mounting depth, ventilated. Includes Installation Guide, Mounting hardware.



Sliding Shelf 100lbs/45.5kg

AR8123 (Beige), AR8123BLK (Black) (X-CERTIFIED)

Occupies 1U of rack space, 4 post mounting, adjustable mounting depth, ventilated. Includes friction pads, Installation Guide, Mounting hardware, User Manual.



Sliding Shelf 200lbs/91kg

AR8128 (Beige), AR8128BLK (Black) (X-CERTIFIED)

4 post mounting, adjustable mounting depth, full extension. Occupies 1U of rack space. Includes Installation Guide, Mounting hardware, Qty 4 - Retaining clips.



STABILIZATION

Bolt-down Bracket Kit

AR8112 (Grey), AR8112BLK (Black) (X-CERTIFIED)

Interior and exterior mounting capabilities. Stabilizes enclosure, UBC Zone 4 stabilization provisions. Includes Installation Guide, Qty 4 - Brackets.



Stabilizer Plate 600mm

AR8115 (Beige), AR8115ABLK (Black) (X-CERTIFIED)

Front or side mounting capabilities. Low profile. Stabilizes enclosure. Includes Installation Guide, mounting hardware, Qty 1 - Plate.



Stabilizer Plate 750mm Black

AR8120BLK (X-CERTIFIED)

Front or side mounting capabilities. Low profile. Stabilizes enclosure. Includes Installation Guide, mounting hardware, Qty 1 - Plate.



TROUGHS AND LADDERS

PDU Shielding Trough 600mm wide Black

AR8160ABLK, (X-CERTIFIED)

Facilitates overhead power distribution. Protective grounding provisions. Tool-less mounting. Includes Installation Guide, Qty 1 - 8 inch/20cm grounding strap.



NetShelter Shielding Trough 600mm wide

AR8161ABLK, (X-CERTIFIED)

Facilitates overhead power distribution. Protective grounding provisions. Tool-less mounting. Includes Installation Guide, Qty 1 - 8 inch/20cm grounding strap.



Shielding Partition Solid 600mm wide Black

AR8162ABLK, (X-CERTIFIED)

Facilitates overhead cable management. Protective grounding provisions, tool-less mounting. Includes Installation Guide, Qty 1 - 8 inch/20cm grounding strap.



Shielding Partition Pass-through 600mm wide Black

AR8163ABLK, (X-CERTIFIED)

Cable pass-through. Facilitates overhead cable management. Protective grounding provisions. Tool-less mounting. Includes Installation Guide, Qty 1 - 8 inch/20cm grounding strap.




Data Cable Ladder 6" (15cm) with Bracket Kit

AR8164ABLK (X-CERTIFIED), AR8164AKIT (ladder alone)



Power Cable Ladder 12" (30cm) with Bracket Kit

AR8165ABLK (X-CERTIFIED), AR8165AKIT (ladder alone)



APC Ladder Bracket Kit

AR8166ABLK (X-CERTIFIED)



Shielding Trough End Cap Black

AR8167BLK (X-CERTIFIED)



ISX Type A Ladder Brackets

AR8168BLK (X-CERTIFIED)



To determine which accessories are compatible with specific models of NetShelter enclosures and racks, check the [Accessory Compatibility Chart](#) on page 18-19.

TROUGHS AND LADDERS

APC Ladder Clamp Kit
AR81169 (X-CERTIFIED)



Shielding Trough for PDU and NSVX 47U
AR8170BLK (X-CERTIFIED)

Facilitates overhead power distribution. Protective grounding provisions. Tool-less mounting. Includes Installation Guide, Qty 1 - 8 inch/20cm grounding strap.



NetShelter Shielding Trough 750mm wide Black
AR8171BLK (X-CERTIFIED)

Facilitates overhead power distribution. Protective grounding provisions. Tool-less mounting. Includes Installation Guide, Qty 1 - 8 inch/20cm grounding strap.



Shielding Partition Solid 750mm wide Black
AR8172BLK (X-CERTIFIED)

Facilitates overhead cable management. Protective grounding provisions. Tool-less mounting. Includes Installation Guide, Qty 1 - 8 inch/20cm grounding strap.



Shielding Partition Pass-through 750mm wide Black
AR8173BLK (X-CERTIFIED)

Cable pass-through. Facilitates overhead cable management. Protective grounding provisions. Tool-less mounting. Includes Installation Guide, Qty 1 - 8 inch/20cm grounding strap.



TROUGHS AND LADDERS

Shielding Trough Cover 600mm wide
AR8174BLK (X-CERTIFIED)



Shielding Trough Cover 750mm wide
AR8175BLK (X-CERTIFIED)



750mm Wide Trough Brackets
AR8176BLK (X-CERTIFIED)



750mm Wide Partition Brackets
AR8177BLK (X-CERTIFIED)




PDU Shielding Trough 750mm Wide Black
AR8178BLK (X-CERTIFIED)

Facilitates overhead power distribution. Protective grounding provisions. Tool-less mounting. Includes Installation Guide, Qty 1 - 8 inch/20cm grounding strap.



The NetShelter VX is the foundation of APC's InfraStruXure™. InfraStruXure is on-demand architecture for power, cooling and environmental management. An effective solution to network-critical physical infrastructure (NCPI), InfraStruXure is the industry's only integrated architecture robust enough to effectively maintain highly available and manageable networks.

For more information about InfraStruXure, visit us online at <http://www.apc.com/products/infrastruxure/index.cfm>.

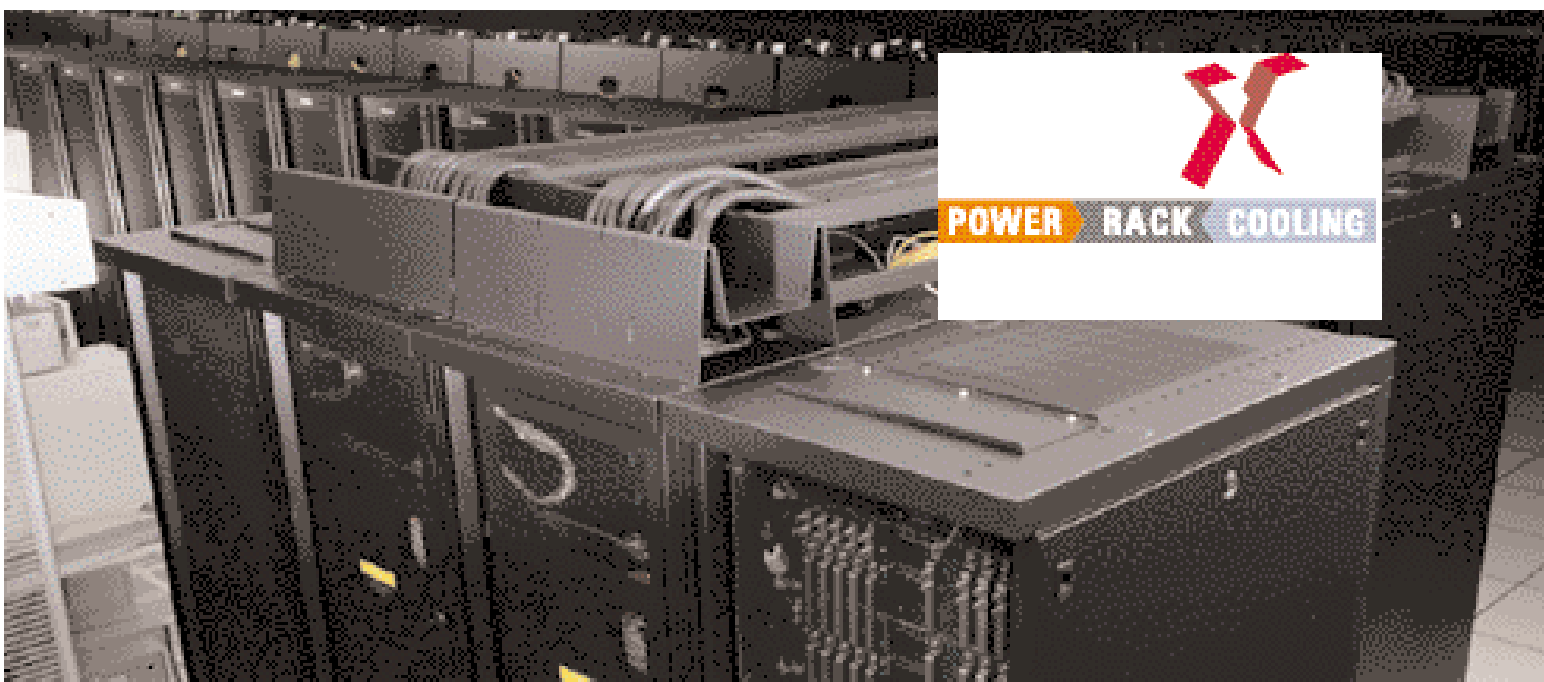

ACCESSORIES COMPATIBILITY CHART

Part number	Description	AR2100 AR2101 AR2102	AR2144 AR2145	AR2103 AR2104	AR2105	AR2310BLK AR2311BLK	AR2800 AR2801 AR2802	AR2805	AR100 AR100HD	AR200 AR201	AR203 AR204
AR8005	#10-32 Hardware Kit (Qty-36)	•	•	•	•	•	•	•	•		.1
AR8006	Equipment Support Rails	•	•	•	•		•	•			
AR8008BLK	Side Channel Cable Trough Black					•					•
AR8010BLK	Recessed Rail Kit for 600mm	•	•	•	•				•		
AR8011BLK	Dual PDU Mounting Brackets	•	•	•	•						
AR8012BLK	Dual PDU Mounting Brackets					•					
AR8013	HP Adapter Kit - L Class/RP54XX	•	•	•	•						
AR8014	HP Adapter Kit - N Class/RP7400	•	•	•	•						
AR8015	M6 Hardware Kit (Qty-32)					•					.1
AR8100	M6 Hardware Kit (Qty-32)	•	•	•		•	•	•			.1
AR8101BLK	Blanking Panel Kit 19" Black	•	•	•	•	•	•	•	•	•	•
AR8105BLK	Fixed Shelf 50lb/23kg Black	•	•	•	•	•	•	•	•	•	•
AR8107BLK	Blanking Panel Kit 23" Black					•					
AR8108BLK	1U Blanking Panel Kit 19" Black	•	•	•	•	•	•	•	•	•	•
AR8109BLK	2U Blanking Panel Kit 19" Black	•	•	•	•	•	•	•	•	•	•
AR8112BLK	Bolt-Down Bracket Kit Black	•		•	•	•	•	•			
AR8113A	Cable Management Rings	•	•	•	•	•	•	•	•	•	•
AR8114BLK	Side Cable Management Tray	•	•	•		•	•				•
AR8115ABLK	Stabilizer Plate 600mm Wide Black	•	•	•		•	•				
AR8116BLK	Cable Containment Brackets Black	•	•	•	•	•					
AR8118BLK	42U Rear Cable Management Tray	•	•			•					
AR8119BLK	47U Rear Cable Management Tray			•							
AR8120BLK	Stabilization Plate 750mm wide					•					
AR8122BLK	Fixed Shelf 250lbs/114kg Black	•	•	•	•	•	•	•			.1
AR8123BLK	Sliding Shelf 100lbs/45kg Black	•	•	•	•	•	•	•			•
AR8127BLK	19" Rotating Keyboard Drawer Black	•	•	•	•	•	•	•			•
AR8128BLK	Sliding Shelf 200lbs/91kg Black	•	•	•	•	•	•	•			•
AR8129**	1U Cable Management Arm	•	•	•	•	•	•	•			•
AR8132	NetShelter VX-VS Door Lock Handle	•	•	•	•	•	•	•			
AR8134BLK	4U Blanking Panel Kit 19" Black	•	•	•	•	•	•	•	•	•	•
AR8135BLK	8U Blanking Panel Kit 19" Black	•	•	•	•	•	•	•	•	•	•
AR8150BLK	Adapter Kit 23" to 19" Mounting					•					
AR8161ABLK*	NetShelter Shielding Trough 600mm	•	•	•			•				•
AR8161ABLKSEISMIC	NetShelter Shielding Trough 600mm		•								
AR8162ABLK*	Shielding Partition Solid 600mm	•	•	•			•				•
AR8162ABLKSEISMIC	Shielding Partition Solid 600mm		•								
AR8163ABLK*	Shielding Partition Pass-Through	•	•	•			•				•
AR8163ABLKSEISMIC	Shielding Partition Pass-Through		•								
AR8164ABLK	Data Cable Ladder 6" Wide Black	•	•	•		•	•				•
AR8164AKIT	Data Cable Ladder 6" Wide Black	•	•	•		•	•				•
AR8165ABLK	Power Cable Ladder 12" Wide Black	•	•	•		•	•				•
AR8165AKIT	Power Cable Ladder 12" Wide Black	•	•	•		•	•				•
AR8166ABLK	Ladder Bracket Kit	•	•	•		•	•				•
AR8167BLK	Trough End Cap Black (Qty-2)	•	•	•		•	•				•
AR8168BLK	Type A PSX Ladder Brackets	•	•	•			•				•
AR8169	Ladder Clamp Kit	•	•	•		•	•				•
AR8171BLK	NetShelter Shielding Trough 750mm					•					

.1 - AR203 ONLY * - Compatible is used with 4-Post Roof (AR8450) ** - Compatible with AR8123BLK, AR8126ABLK, AR8127BLK, AR8128BLK

ACCESSORIES COMPATIBILITY CHART

Part number	Description	AR2100 AR2101 AR2102	AR2144 AR2145	AR2103 AR2104	AR2105	AR2310BLK AR2311BLK	AR2800 AR2801 AR2802	AR2805	AR100 AR100HD	AR200 AR201	AR203
AR8172BLK	Shielding Partition Solid 750mm					•					
AR8173BLK	Shielding Partition Pass-Through					•					
AR8174BLK	Shielding Trough Cover 600mm Wide	•	•	•		•					•
AR8334BLK	EP-VX-VS 42U Baying Kit										
AR8175BLK	Shielding Trough Cover					•					
AR8176BLK	750mm Trough Brackets					•					
AR8177BLK	750mm Partition Brackets					•					
AR8206BLK	Wall mount fan tray								•		
AR8207BLK	Wall mount fan tray								•		
AR8210BLK	Roof fan tray	•	•	•	•	•	•	•			•
AR8211BLK	Roof fan tray	•	•	•	•	•	•	•			•
AR8212BLK	Fan tray baffle plates					•					
AR8339BLK	VX-VS 42U Privacy Panel Black	•	•		•	•					
AR8349BLK	VX 42U Privacy Panel Black	•	•			•					
AR8355	WX Vented Gland Plate								•		
AR8359	WX Caster Kit								•		
AR8376BLK	VX-VS 42U External Baying Kit	•				•	•				
AR8377BLK	VX-VS 47U External Baying Kit			•							
AR8390	Grounding Kit	•	•	•	•	•	•	•			
AR8400	#12-24 Hardware Kit (Qty-24)									•	AR204
AR8410	4-Post Baying Brackets 24"										•
AR8411	4-Post Baying Brackets 600mm s										•
AR8415	4-Post PDU Mounting Brackets										•
AR8416	4-Post PDU Adapter Plates										•
AR8417	4-Post Rack PDU Adapter Brackets										•
AR8422	Double-Sided Fixed Shelf 2-Post									•	
AR8425A	1U Horizontal Cable Organizer	•	•	•	•	•	•	•	•	•	•
AR8426A	2U Horizontal Cable Organizer	•	•	•	•	•	•	•	•	•	•
AR8427A	2U Patch Cord Organizer	•	•	•	•	•	•	•	•	•	•
AR8428	2U Patch Cord Organizer with Pass-Thru	•	•	•	•	•	•	•	•	•	•
AR8429	1U Cable Pass-Thru with Brush Strip	•	•	•	•	•	•	•	•	•	•
AR8440A	3" Vertical Cable Organizer									•	•
AR8441A	6" Vertical Cable Organizer									•	•
AR8445	3" Control Bracket Kit									•	
AR8446	6" Control Bracket Kit									•	
AR8450	NetShelter 4-Post Rack Roof										•
ACF001	Air Distribution Unit 2U RM 115V	•	•	•	•	•	•	•			
ACF002	Air Distribution Unit 2U RM 230V	•	•	•	•	•	•	•			
ACF003	Air Distribution Unit 2U RM 100V	•	•				•				
ACF101BLK	Air Removal Unit 115VAC, 60HZ	•	•				•				
ACF102BLK	Air Removal Unit 230VAC, 50HZ	•	•				•				
ACF120	Air Ducting Kit	•	•				•				
ACF122	ARU Door Grille Kit	•	•				•				

Since 1981, APC has been a global leader in power availability solutions, setting the industry standard for quality, innovation and support. From its corporate headquarters in West Kingston, Rhode Island, APC operates sales offices throughout the world and manufacturing facilities on three continents.

Over 15 million satisfied customers worldwide depend on APC's Legendary Reliability™. Propelled by real-world experience and a drive towards technological innovation, APC has the experience, scale, global presence, and stability to respond to emerging IT availability needs.



"... the highest technical support rating received by any vendor in any category of the 2002 Channel Champions Survey."
— Channel Champions 2002 – Rack-Mounted UPSs", *Computer Reseller News*, Mark Spiwak



To receive a FREE APC white paper on essential rack systems requirements for next generation data centers, please visit us online at <http://promo.apc.com> and enter key code **68807v**. Other APC white papers are also available.

APC's manufacturing system is certified to ISO9001 & ISO14001 standards.



APC
Legendary Reliability®